



BAG LOADING / UNLOADING CONVEYOR

USES:- COLD STORE / WARE HOUSES/ GODOWNS



Purpose: To overcome labour shortage and to reduce loading/unloading time & cost.


Advantage: Enormous saving in labour, Low cost application, Less time consumption, High capacity, Less maintenance, High return etc

Technical Details:

Width of belt : 600 mm, NN 3ply 8 mm thickness
 Head and tail pulley dia : 250mm with crowning and rubber lining for better traction
 Idler supporting rollers dia : 50mm
 Head & Tail shaft dia. : 45mm
 Tail shaft tensioner : Provided
 Main body :G.I. sheet
 Motor : 2-10 HP, 3 Ph
 (as per length) geared motor with VFD
 Linear Velocity : Approx.30 m/min

Services for all types of conveyors

Spares parts for all types of conveyors

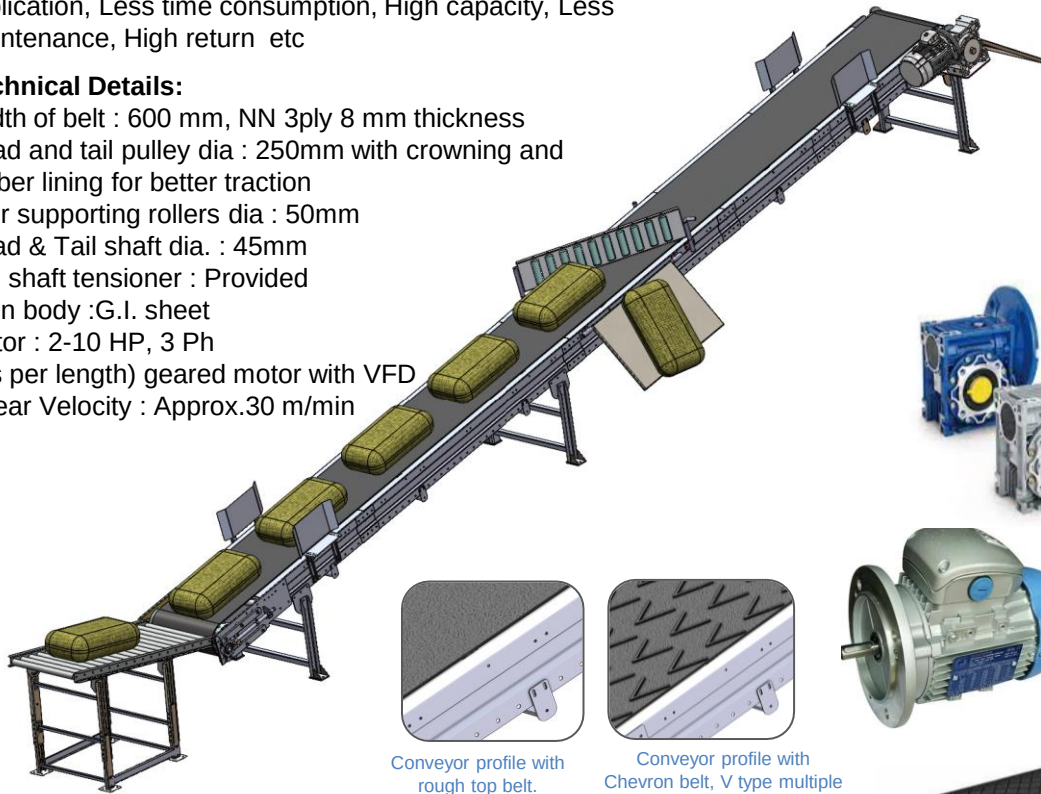


Control Panel / VFD



Gearbox




Motor





Conveyor profile with rough top belt.



Conveyor profile with Chevron belt, V type multiple

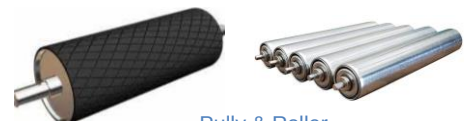

Pully & Roller

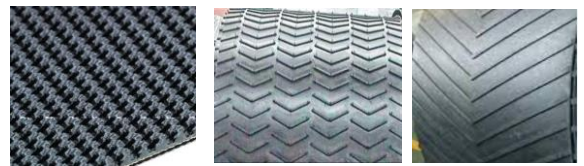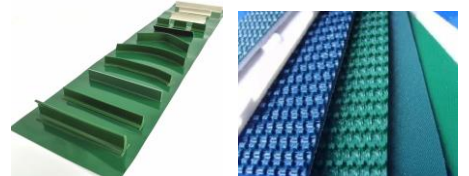

Belt- All types



Our Presence

PRODUCTS AND SOLUTIONS WE DEAL IN

